



Automatic operation of the toilet cabin

In mode « FREE »:

- The cabin indicates « FREE >>
- The door is unlocked.
- The light is OFF.
- The outside touchless button is unlocked.

In mode « OCCUPIED »:

Upon opening the door:

- The light will turn ON.
- The cabin indicates « FREE ».

After closing the door:

- The light is ON.
- After 5 seconds the door will be automatically locked and the cabin indicates occupied ».
- The outside touchless button will lock.
- If the user has locked the door manually from inside, the system will lock the outside touchless button.




I. Disinfection system

By pressing the "Cleaning" icon and after the system checks for non-presence in the room, the controller turns on the UV light to disinfect the entire room for 30 seconds. The sanitary indicates "Cleaning". By opening the door, the system turns UVlight OFF immediately.

II. Control system

Our system is equipped with a 10.1 " color HMI TOUCH. Easy to use !
Simply touch the screen with your finger to manipulate the information on the screen.

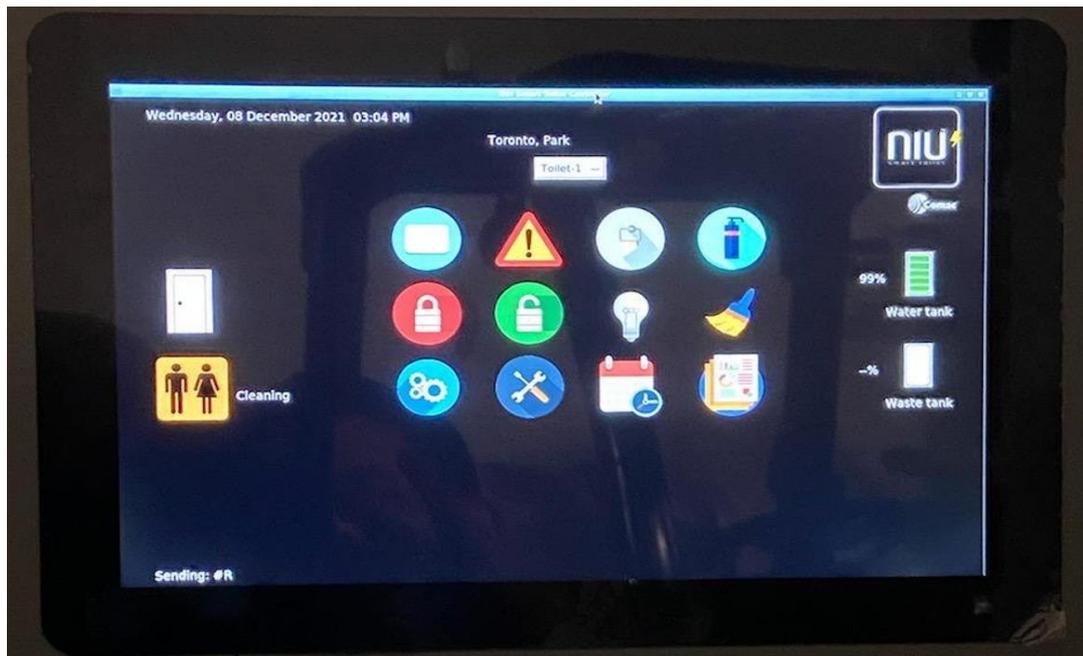

1. Wifi configuration



Instructions


- 1- Click on « Settings ».
- 2-Enter WIFI Information
- 2-Enter your country code
- 3- Click on the button:
« Update network information »
- 4-Enter the product serial number
- 5- Click on the button « UPDATE ».
- 6-Check the connection status

2. Online platform access

Please use the following link to access to our online platform:

<http://vps169842.vps.ovh.ca/cloudapp/?app=dryer>

If you have already the credentials to access, please enter your email and password and press 'LOGIN' button.

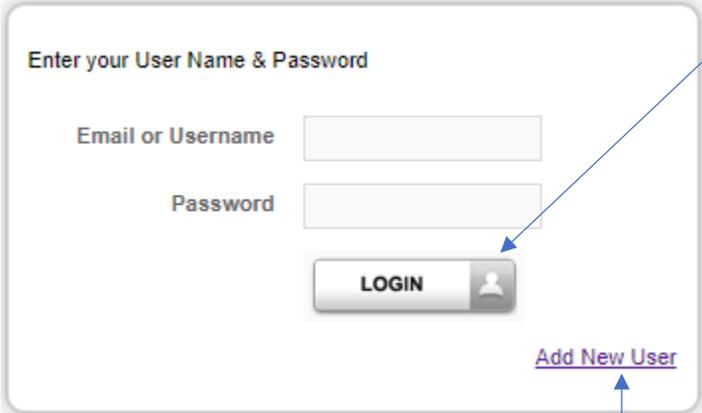

Enter your User Name & Password

Email or Username

Password

LOGIN 

[Add New User](#)

The image shows a login form with two input fields, a button, and a link. A blue arrow points from the top right of the page to the LOGIN button, and another blue arrow points from the bottom of the page to the Add New User link.

If it is the first access when you receive a new product then click the link 'Add New' User. Fill in the different fields especially the Serial number labeled on the new product and then click *Register* button.

New User Registration

serial number

Company name

Company address

Company phone

User first name

User last name


User email

Password

Confirm password



Finally, you can access with your new credentials as follow.

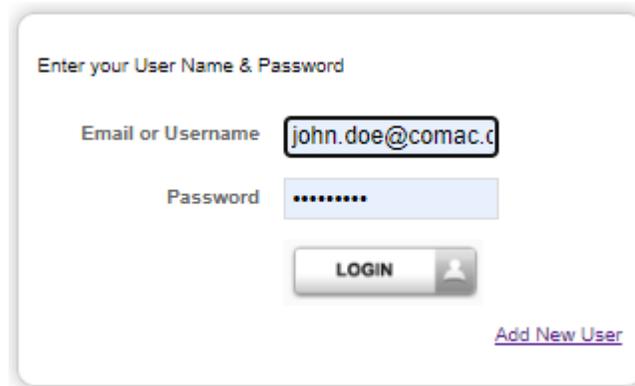

Enter your User Name & Password

Email or Username


Password



[Add New User](#)

3. Management access

In the left side you will see all the management access options. Click ‘+’ or ‘-’ to browse all the sub- options or to reduce the sub-options.

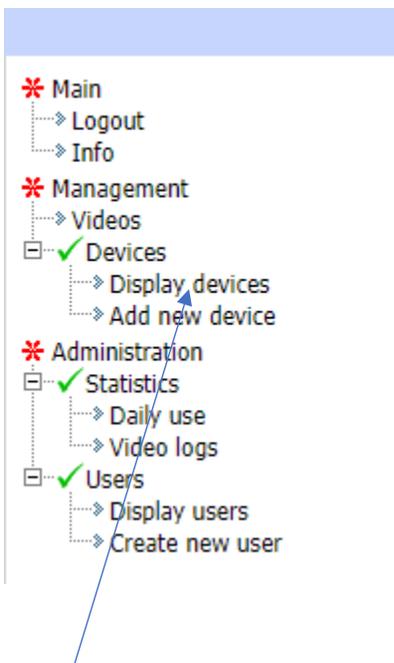


To display all the devices, click on ‘*Display devices*’ option. Then, you can check the last contact time of the product with the server. Refresh the page to update the product information.



Edit

Click ‘*Edit*’ button to modify the product information or to ‘*lock*’ or ‘*unlock*’ the product remotely.

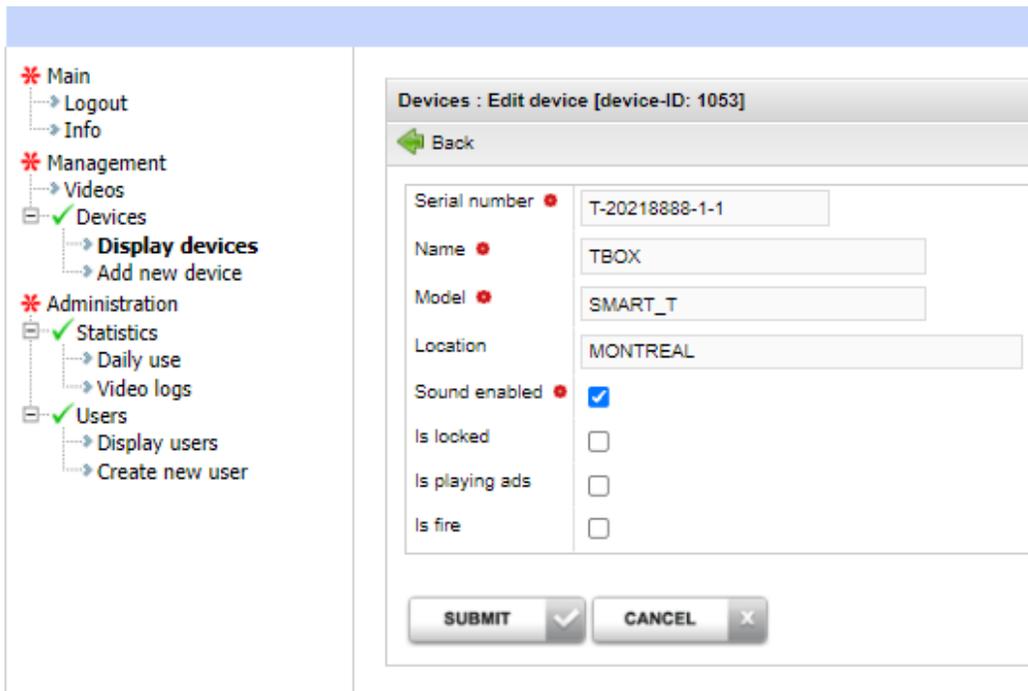

To add a new device, click on ‘*Add new device*’ option in the menu and then enter the information about the received product.

Devices : Add new device

Back

Serial number

Name

Model

Location

Sound enabled

Is locked

Is playing ads

Is fire

Is led idle

Led color

SUBMIT CANCEL

To display the daily use of a product , click on ‘*Daily use*’ option in the menu and then choose the device name to display the number of uses by day.

Device name

Daily use

ACTION	Raw-id	Device name	Serial number	Date	Daily use

4. Administrative access

To display users, click on '*Display users*' option in the menu and then you can edit user's information.

The screenshot displays a web application interface. On the left is a navigation menu with the following structure:

- * Main
 - Logout
 - Info
- * Management
 - Videos
 - ✓ Devices
 - Display devices
 - Add new device
- * Administration
 - ✓ Statistics
 - Daily use
 - Video logs
 - ✓ Users
 - **Display users**
 - Create new user

The right side of the interface shows a form titled "Users : Edit user [user-ID: 1020]". It includes a "Back" button and the following fields:

First name *	John
Last name *	Doe
Username *	john.doe@comac.com
Password *
Language *	en
Address *	747 Blvd Industriel
City *	Montreal
Prov./State	QC
Zip code	H6Y 3G4
Country *	CA
Phone	15142345678
Email	john.doe@comac.com

At the bottom of the form are two buttons: "SUBMIT" with a checkmark icon and "CANCEL" with an 'X' icon.

To add a new user, click on 'Create new *user*' option in the menu and then enter the information about the new user.

The screenshot displays a web application interface. On the left is a navigation menu with the following structure:

- * Main
 - Logout
 - Info
- * Management
 - Videos
 - ✓ Devices
 - Display devices
 - Add new device
- * Administration
 - ✓ Statistics
 - Daily use
 - Video logs
 - ✓ Users
 - Display users
 - **Create new user**

The main content area on the right is titled "Users : Add new user" and features a "Back" button with a left-pointing arrow. Below the title is a form with the following fields:

- First name *
- Last name *
- Username *
- Password *
- Language * (value: en)
- Address *
- City *
- Prov./State
- Zip code
- Country *
- Phone
- Email

At the bottom of the form are two buttons: "SUBMIT" with a checkmark icon and "CANCEL" with an 'x' icon.